

# CURRENCY CREEK, FINNISS RIVER AND GOOLWA CHANNEL WATER QUALITY REPORT

Report 18, to 24th March 2010

## OBSERVATIONS AT A GLANCE

- pH remains at satisfactory levels at all sites.
- Alkalinity levels at several Currency Creek sites have declined to between 39 and 60 mg/L.
- Alkalinity remains relatively stable at most Finnis River sites but levels at site FRWL2 have declined to 42 mg/L.
- Salinity continues to increase at all sites.

## BACKGROUND

The Environment Protection Authority, Department for Environment and Heritage and Department of Water, Land and Biodiversity Conservation are monitoring water quality to assess potential water impacts associated with the exposure of acid sulfate soils and recent water level changes in the Goolwa Channel, Currency Creek and Finnis River region as a result of the Goolwa Channel Water Level Management Project. Further information regarding the project can be found at: <http://www.dwlbc.sa.gov.au/murray/drought/gcfl.html>.

## WATER QUALITY PARAMETERS

A wide range of water quality parameters are being analysed in an integrated program across the Lower Lakes (see [http://www.epa.sa.gov.au/environmental\\_info/water\\_quality/monitoring\\_programs\\_and\\_assessments/lower\\_lakes](http://www.epa.sa.gov.au/environmental_info/water_quality/monitoring_programs_and_assessments/lower_lakes)). Key field-based parameters for Currency Creek, Finnis River and Goolwa Channel reported herein are pH, acidity, alkalinity, salinity and turbidity.

***pH is an indicator of acidity or alkalinity. Neutral water has a pH of 7, acidic solutions have lower values and alkaline solutions have higher values. The pH in the region is normally between 8 and 8.5, but acid inputs from acid sulfate soils can result in lower pH values.***

***Alkalinity is a measure of the buffering capacity of water, or the capacity of the water to neutralise acids and resist pH change. Alkalinity within water bodies is consumed as acid is released from acid sulfate soils. Adding limestone contributes alkalinity to waters helping to neutralise any acid released from the sediments. Historically, alkalinity levels within this region have been between 100 and 250 mg/L as CaCO<sub>3</sub>.***

***Salinity is a measure of the amount of dissolved salts in the water. Saline water conducts electricity more readily than freshwater so electrical conductivity (EC) is routinely used to measure salinity. As salinity increases it may become toxic to native freshwater organisms. Prior to drought conditions salinity was observed between 1000 and 1200  $\mu\text{S}/\text{cm}$  (EC) within the region.***

***Turbidity is a measure of the cloudiness or haziness in water caused by suspended sediment. Turbidity is expressed in Nephelometric Turbidity Units (NTU) and is measured using a relationship of light reflected from a given sample. Turbidity is very variable in the Lower Lakes and influenced primarily by wind events.***


## **SAMPLING SITES**

The sample sites where water quality monitoring is undertaken are shown in Figure 1. Several of these sites have been identified as high risk and as a result have been monitored as regularly as possible (in some instances up to 5 times per week).

Currency Creek and Finniss River site descriptions and justification for their selection are contained in prior reports (e.g. see Table 1, Report 7 on the EPA website).

The Goolwa Channel sites selected include sites both upstream (e.g. Clayton 2) and downstream (e.g. Clayton 3C, Finniss 3, GC Channel and Goolwa Bridge) of the regulator near Clayton.

**Figure 1 - Map of Sample Sites**

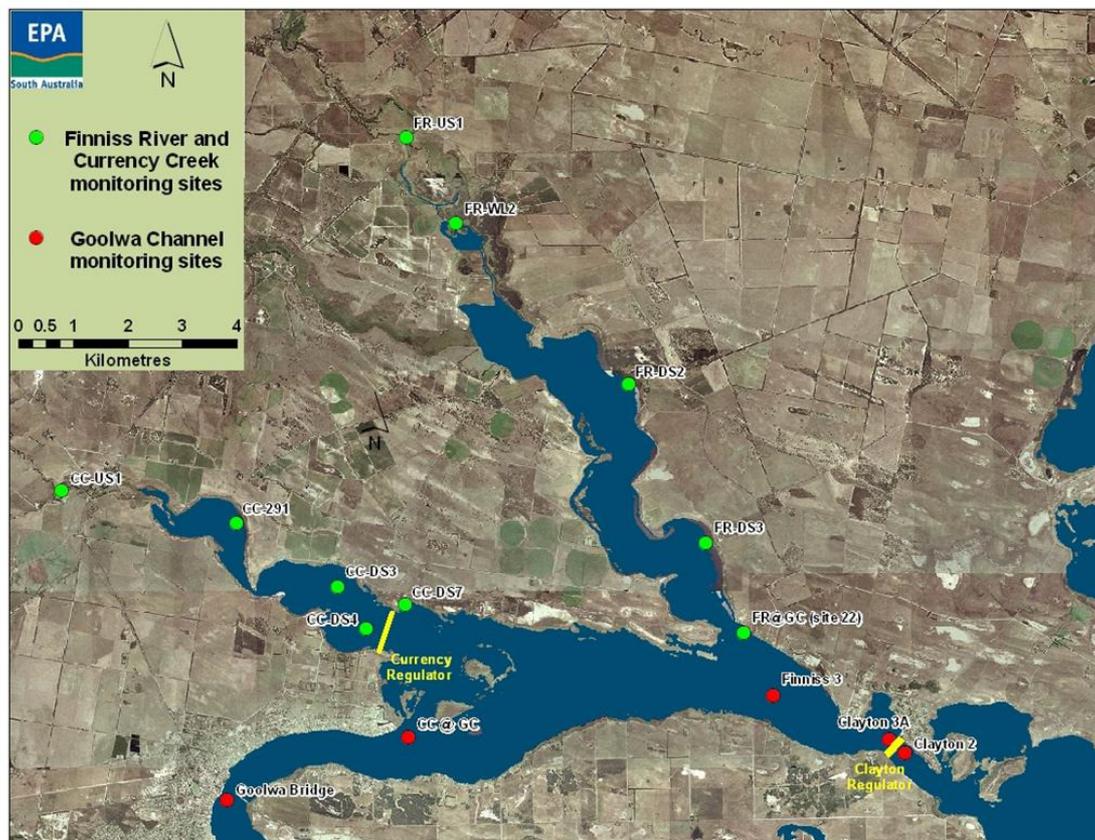

## **LIMESTONE MANAGEMENT RESPONSE**

Trials of various pre-emptive or reactive (to water acidity) limestone additions have been undertaken in the area between April and July 2009 to mitigate the risk of acidification. For details of locations and volumes refer to Report 5 on the EPA website. Further limestone additions may be undertaken in the future as required.

## **CURRENCY CREEK WATER QUALITY**

Surface water quality results are discussed below for selected sites and parameters in the Currency Creek region. Please refer to the graphs in Figure 2 for this section and to Figure 3 for rainfall at Currency Creek.

### ***pH***

- The pH levels of all sites within Currency Creek are now between 7.90 and 8.84 (22/03/10)
- Sites within Currency Creek continue to show stable pH which has been the case since the 3/11/09.


## ***Alkalinity***

- Although pH is satisfactory at all Currency Creek sites, alkalinity continues to remain quite variable at different sites.
- CCUS1 continues to exhibit high alkalinity (525 mg/L on 22/3/10) which is most likely a result of the groundwater inputs (high alkalinity) into the Currency Creek catchment being relatively undiluted at this time of year. This increase is consistent with values observed at this site at the end of last summer. Flows from Currency Creek have all but ceased and any inputs into the lower Currency Creek are now minimal.
- Site CC291 continues to exhibit low alkalinity and is displaying a declining trend, currently values stand at 42 mg/L (22/03/10).
- Alkalinity at site CCDS3 previously exhibited signs of improvement with values reaching 135 mg/L on the 14/01/09. Since that time this site has also shown a clear declining trend and values currently (22/03/10) stand at 60 mg/L.
- CCDS4 has previously exhibited signs of improvement with values reaching 100 mg/L on 14/01/10, however over the past two months the site has exhibited a clear declining trend. Currently values stand at 62 mg/L (22/03/10).
- Alkalinity at the mouth of Currency Creek at the Goolwa Channel (CC@GC) currently stands at 150 mg/L (22/03/10).


## ***Salinity (EC)***

- Salinity levels at CC291, CCDS3, CCDS4 and CC@GC are quite similar (between 14691  $\mu\text{S}/\text{cm}$  and 17275  $\mu\text{S}/\text{cm}$  on 22/03/10). There is however an increasing salinity trend due to evaporative concentration over the warmer months and relatively low rainfall, especially at CC291 at the top of Currency Creek (see Figure 3).

**Figure 2 - Currency Creek Water Quality**

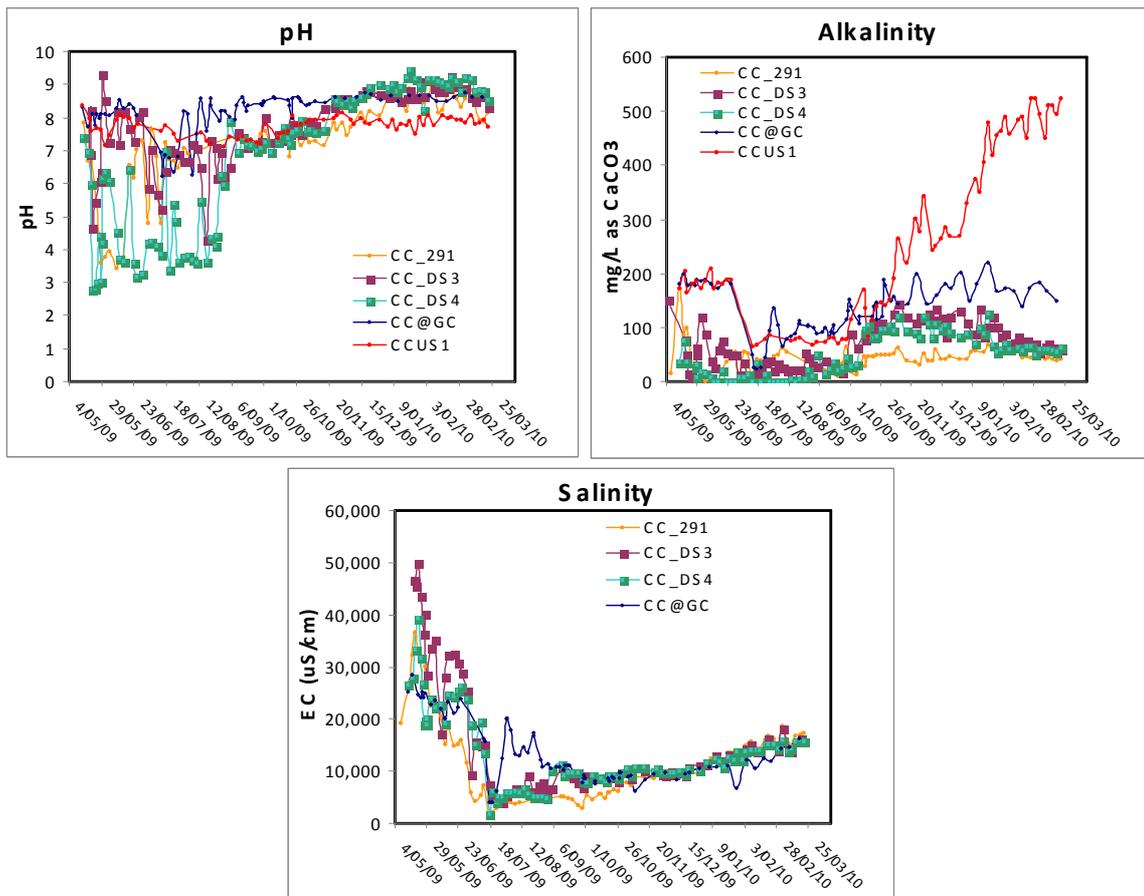

**Figure 3 - Rainfall at Currency Creek**

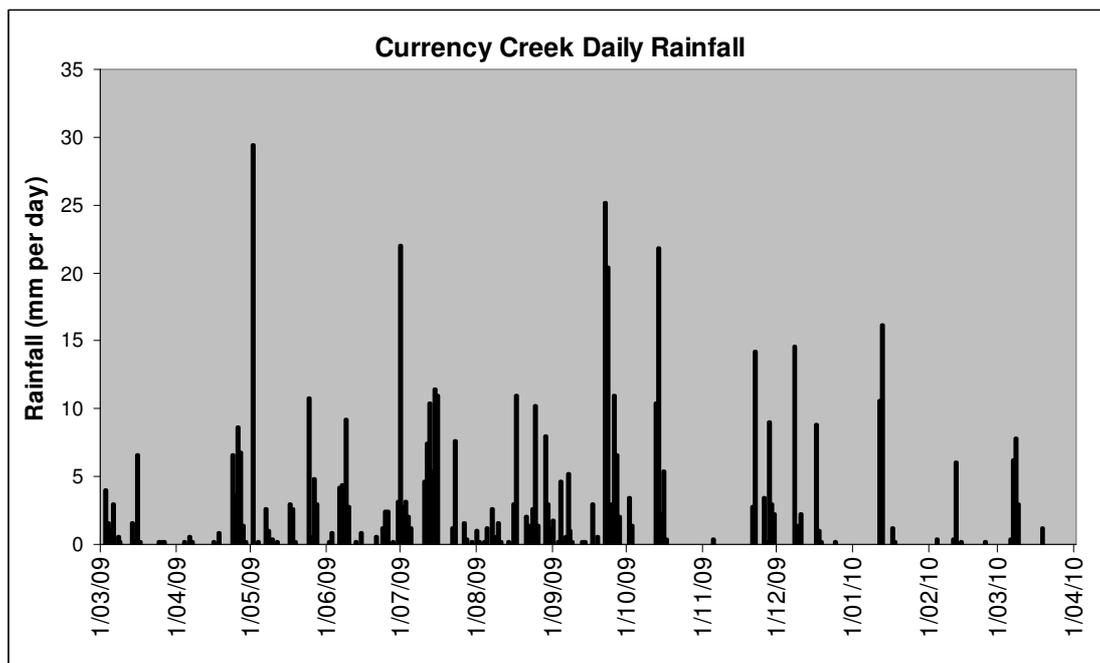

Data from South Australian Murray-Darling Basin NRM Board weather station  
 (refer to <http://www.samdbnrm.sa.gov.au/Portals/7/AWMN/awsview.php>)

## FINNISS RIVER WATER QUALITY

Water quality results are discussed below for selected sites and parameters in the Finniss River region. Please refer to the graphs in Figure 4 for this section.

### ***pH***

- pH levels at all Finniss River sites are now between 7.4 and 8.41 (22/03/10) and within the ANZECC guidelines (pH 6.5 to 9.0) for protection of aquatic ecosystems.


### ***Alkalinity***

- Most sites in the Finniss River have satisfactory alkalinity levels (they range between 50 mg/L and 210 mg/L on 22/03/10).
- Sites FRUS1, FR@GC and FRDS3 all exhibited an increasing trend in alkalinity from the 7<sup>th</sup> to the 29<sup>th</sup> of December. Levels have remained relatively stable since the 29<sup>th</sup> December and on 22/03/10 stand at 130 mg/L (FRDS3), 150 mg/L (FR@GC) and 210 mg/L (FRUS1).
- Alkalinity at FRDS2 dropped to 90 mg/L on the 5/03/10, however since this time has increased to currently stand at 130 mg/L (22/03/10).
- FRWL2 has been showing a declining trend in alkalinity since 9/12/09 where it stood at 126 mg/L, and currently (22/03/10) levels stand at 45 mg/L. This is much lower than the upstream site FR-US1 and could indicate localised acid inputs from acid sulfate soils. This area has been previously identified by CSIRO as an acid sulfate soil “hotspot”.

### ***Salinity (EC)***

- Since December all four sites within the Finniss River have exhibited an increasing salinity trend, with the higher levels recorded closer to the Goolwa Channel. Currently (22/03/10) salinity at the sites ranges between 2422  $\mu\text{S}/\text{cm}$  (upstream site, FR-US1) and 12257  $\mu\text{S}/\text{cm}$  (downstream site, FR@GC).

## Figure 4 - Finniss River Water Quality

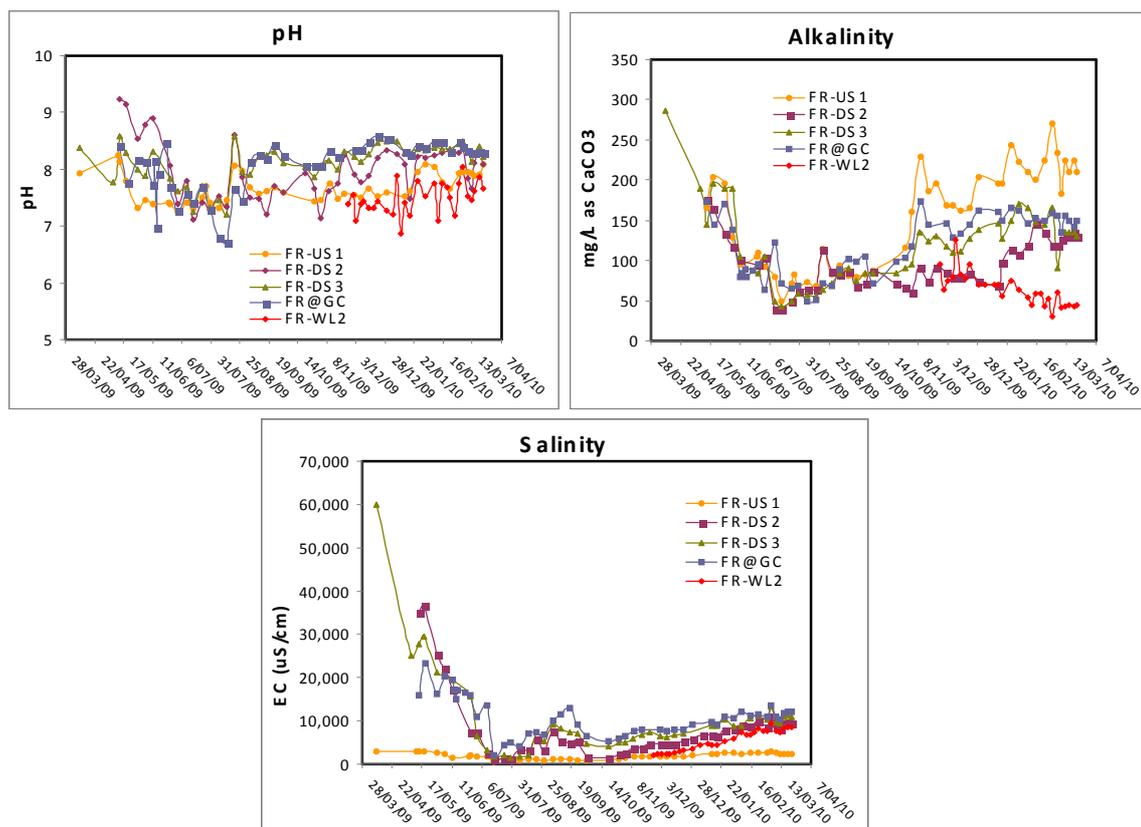

## GOOLWA CHANNEL WATER QUALITY

Surface water quality results are discussed below for selected sites and parameters in the Goolwa Channel region. Please refer to the graphs in Figure 5 for this section. Many of these sites were added as the Goolwa Regulator near Clayton neared completion. Pumping of water from Lake Alexandrina (approximately 26 GL) began on 11 September 2009 and ceased on 9 November 2009.

### **pH**

- The pH of all sites monitored in the Goolwa Channel are now between 8.49 and 8.81 (22/03/10) and within the ANZECC guideline values for protection of aquatic organisms.

### **Alkalinity**

- Alkalinity in the Goolwa Channel has remained at satisfactory levels at all sites (above 150 mg/L; 22/03/10). Since the Goolwa Channel Water Level Management Project was implemented there has been an overall increase in alkalinity at all sites in the Goolwa channel.


## Salinity (EC)

- Salinity decreased substantially at all sites due to dilution from the tributary inflows and pumping from Lake Alexandrina between 27/11/09 and 11/12/09. However since mid December, salinity levels at all sites have exhibited increasing trends. Currently salinity levels at all sites are between 12562 and 17096  $\mu\text{S}/\text{cm}$  (22/03/10).

## Turbidity

- Since pumping finished the turbidity at the sites closest to the regulator (Finniss 3, Clayton 3A) has decreased markedly. Currently all four sites (Goolwa side of regulator) range between 2.4 and 5.9 NTU (10/03/10) and have a declining trend. The very low turbidity in this region is likely due to lower concentrations of suspended particles in tributary flow, settling in the pool behind the regulator and salt-induced coagulation of clay colloids. A large increase in filamentous (*Cladophora sp.*) and macro-algal growth (*Stuckenia pectinata*) has been observed in this region, presumably as a result of the greater water clarity. Site Clayton 2 which is located on the eastern side of the Goolwa Regulator is an exception to this trend. Currently (10/03/10) turbidity stands at 46 NTU, which is similar to other sites within Lake Alexandrina.

Figure 5 - Goolwa Channel Water Quality

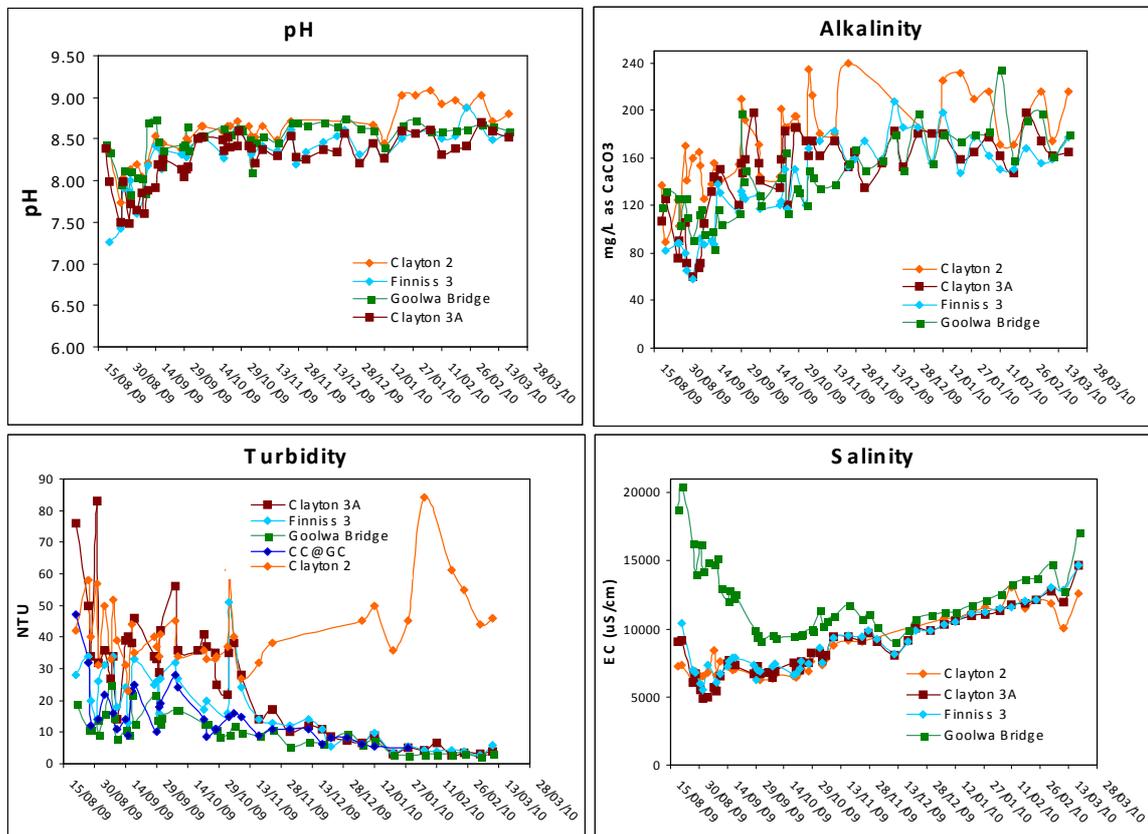

Further information on water quality and quantity, and acid sulfate soils, can be found on the following websites:

- Department for Environment and Heritage [www.environment.sa.gov.au/cllmm/](http://www.environment.sa.gov.au/cllmm/)
- River Murray Data <http://data.rivermurray.sa.gov.au/> (real-time data)
- Environment Protection Authority [www.epa.sa.gov.au](http://www.epa.sa.gov.au) or for specific Lower Lakes data see [www.epa.sa.gov.au/environmental\\_info/water\\_quality/monitoring\\_programs\\_and\\_assessments/lower\\_lakes](http://www.epa.sa.gov.au/environmental_info/water_quality/monitoring_programs_and_assessments/lower_lakes)
- Department of Water, Land and Biodiversity Conservation [www.dwlbc.sa.gov.au](http://www.dwlbc.sa.gov.au)
- South Australian Murray–Darling Basin Natural Resource Management Board [www.samdbnrm.sa.gov.au](http://www.samdbnrm.sa.gov.au)
- Murray–Darling Basin Authority [www.mdba.gov.au](http://www.mdba.gov.au)
- Waterwatch [www.waterwatch.org.au](http://www.waterwatch.org.au)
- CSIRO acid sulfate soils [www.clw.csiro.au/acidsulfatesoils/murray.html](http://www.clw.csiro.au/acidsulfatesoils/murray.html)