


# ADELAIDE DESALINATION PROJECT

---

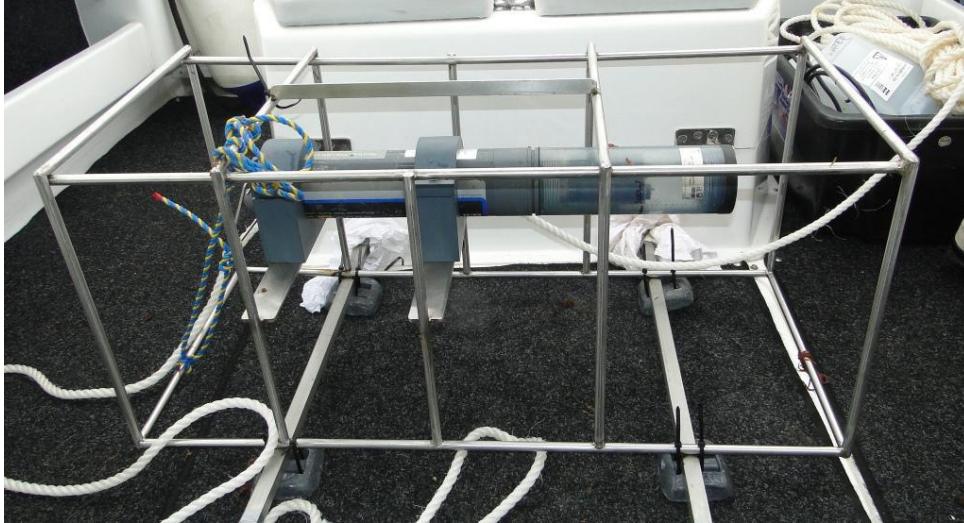

Water temperature, pH and dissolved oxygen  
water quality data  
from the  
ADP marine exclusion zone  
November/December 2013

Report prepared by



This publication may be cited as

Kildea, T.N. (2013) Adelaide Desalination Project: Water temperature, pH and dissolved oxygen water quality data from the marine exclusion zone. November/December 2013. Australian Water Quality Centre, Adelaide. 10 pp.

#### Revision History

Date	Document status	Author	Reviewer
28/11/2013	Draft	TK	
27/2/2014	Internal review		LvdL
27/2/2014	Submitted to AA		

#### Disclaimer

The information and recommendations provided in this publication are based on the best available information at the time of writing. The author does not accept any liability for the contents of this document or any consequences arising from the use of the information contained within it. The views expressed by the author in this publication are not necessarily those of SA Water or the Australian Water Quality Centre.

© 2014 Australian Water Quality Centre

## 1 Introduction

In December 2007, the South Australian Government announced the proposal to construct a reverse osmosis seawater desalination plant at Port Stanvac. The Adelaide Desalination Project was initiated to provide metropolitan Adelaide with a sustainable and secure supply of drinking water. The project aims to deliver a climate independent water source that will supplement and secure the metropolitan area's water supply and reduce the reliance on traditional water sources, such as the River Murray.

A multi-national consortium, AdelaideAqua, comprising McConnell Dowell Constructors, Abigroup Contractors, ACCIONA Agua, and Trility, were awarded the contract to design, build, operate and maintain the plant for 20 years. As of December 2012, the plant has become fully operational producing drinking water which is used by SA Water to supply metropolitan Adelaide.

Port Stanvac was selected as the preferred site for the Adelaide Desalination Plant (ADP) due to accessibility of relatively deep seawater, good oceanographic dispersion characteristics, its proximity to the water supply network, suitable land availability and lower construction costs.

The initial development phase of the Adelaide Desalination Project identified a number of important environmental issues to take into consideration when operating the plant (EIS 2008), in particular minimising the impact of discharging saline concentrate into the sea.

Concerns were raised by the public, in the initial development of the project, in regards to the potential reduction of dissolved oxygen at the seabed due to the discharge of saline concentrate into the region (EIS Response Document 2009). The risk of depleting oxygen on the seabed was considered low but to provide assurance that dissolved oxygen (DO) concentrations in the region were remaining above 6 mg/L (EPA Water Quality criteria for the protection of marine ecosystems), it was proposed that *in situ* measurements of DO concentrations should be incorporated into the monitoring program.

The EPA Licence (26902) granted to Adelaide Aqua to operate the desalination plant stipulates that DO and pH must be monitored twice per month for at least 24 hours under a variety of different operational modes and receiving environment conditions.

The scope of this study is to characterise ambient DO and pH concentrations on the seafloor, approximately 100 metres from the ADP diffuser, for periods greater than 24 hours under different plant operational modes and receiving environment conditions.

## 2 Methods

### 2.1 *In situ* water quality assessment

*In situ* water quality is assessed using a YSI 6600 series V4 sonde (instrument specifications provided in Table 1), that measures a variety of different parameters. The parameters measured include:

- Dissolved Oxygen (mg/L and percent saturation);
- pH; and
- Water temperature (degrees Celsius)

The sonde is fixed within a stainless steel cage (see cover photo) and lowered to the seafloor, approximately 100 metres south of the ADP diffuser. Water quality data are logged and stored every ten minutes, which includes the instruments depth (metres). The depth data provides information on tidal movement during day, as the instrument is fixed 0.50 m above the seafloor, thus any change in depth is directly related to either tidal or swell patterns during the day.

### 2.2 Instrument Specifications

Table 1. YSI 6600 series V4 sonde specifications detailing range, accuracy and resolution

Parameter	Sensor Type	Range	Accuracy	Resolution
Water temperature	Thermistor	-5 to 45 °C	+/- 0.15 °C	0.01 °C
Dissolved Oxygen	Optical, Luminescence lifetime	0-50 mg/L	+/- 1% of reading or 0.1 mg/L (whichever is greater)	0.01 mg/L
pH	Glass combination electrode	0-14 units	+/- 0.2	0.01 units

### 2.3 Quality Control/Assurance

Individual sensors are calibrated before each sampling trip, using procedures outlined in the YSI technical manual. pH standards are prepared by AWQC's Analytical Quality Control Laboratory to ISO 9001 requirements.

### 2.4 Data analysis

The data are presented in a graphical format comparing changes in tidal variation to changes in pH (pH units), DO (% saturation) and water temperature (°C).

The water quality data are summarised for each sampling period as:

- Maximum and minimum average daily range
- Maximum daily variation
- Average daily variation


## 3 Results

### 3.1 Plant operations

During the sonde deployment 27<sup>th</sup> November to the 17<sup>th</sup> December, the Adelaide Desalination Plant was in operation, mean daily production of permeate during this period was 171 MLD. The ADP regularly discharged saline concentrate to the marine environment during this time, which had an approximate salinity concentration of 71 ppt. Daily volumes of saline concentrate discharged into the marine environment during the sonde deployment ranged from minimum 0 MLD (3<sup>rd</sup> December) to a maximum of 277 MLD (14<sup>th</sup> December).


### 3.2 Dissolved oxygen

The daily average percent oxygen saturation ranged between 96 % to 101 %. Maximum daily variation was 7 % (3<sup>rd</sup> December; Figure 2). Average daily variation was 4 %.

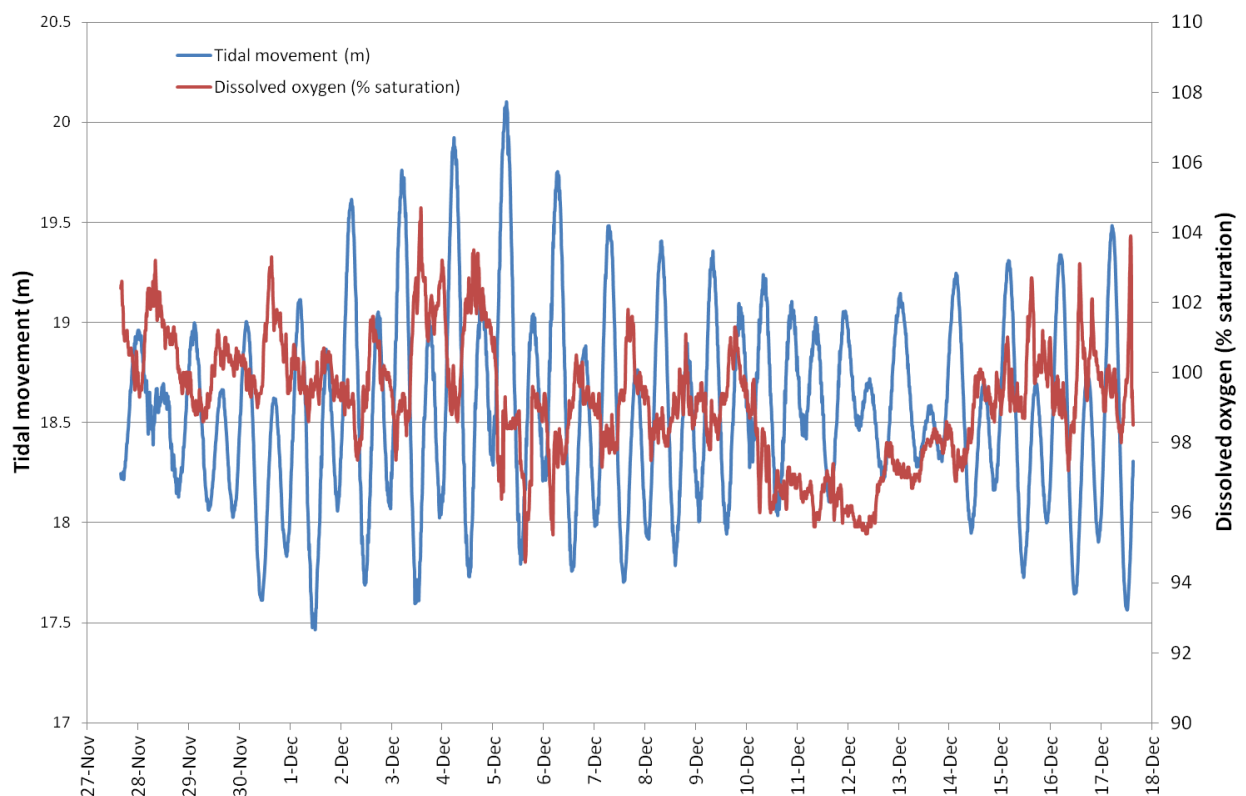

**Figure 2.** Changes in dissolved oxygen (%) with tidal movement (m) over twenty one days, from 27<sup>th</sup> November to 17<sup>th</sup> December 2013.


The daily average dissolved oxygen concentration ranged between 7.2 mg/L to 7.6 mg/L. Maximum daily variation was 0.5 mg/L (3<sup>rd</sup> December; Figure 3). Average daily variation was 0.3 mg/L.

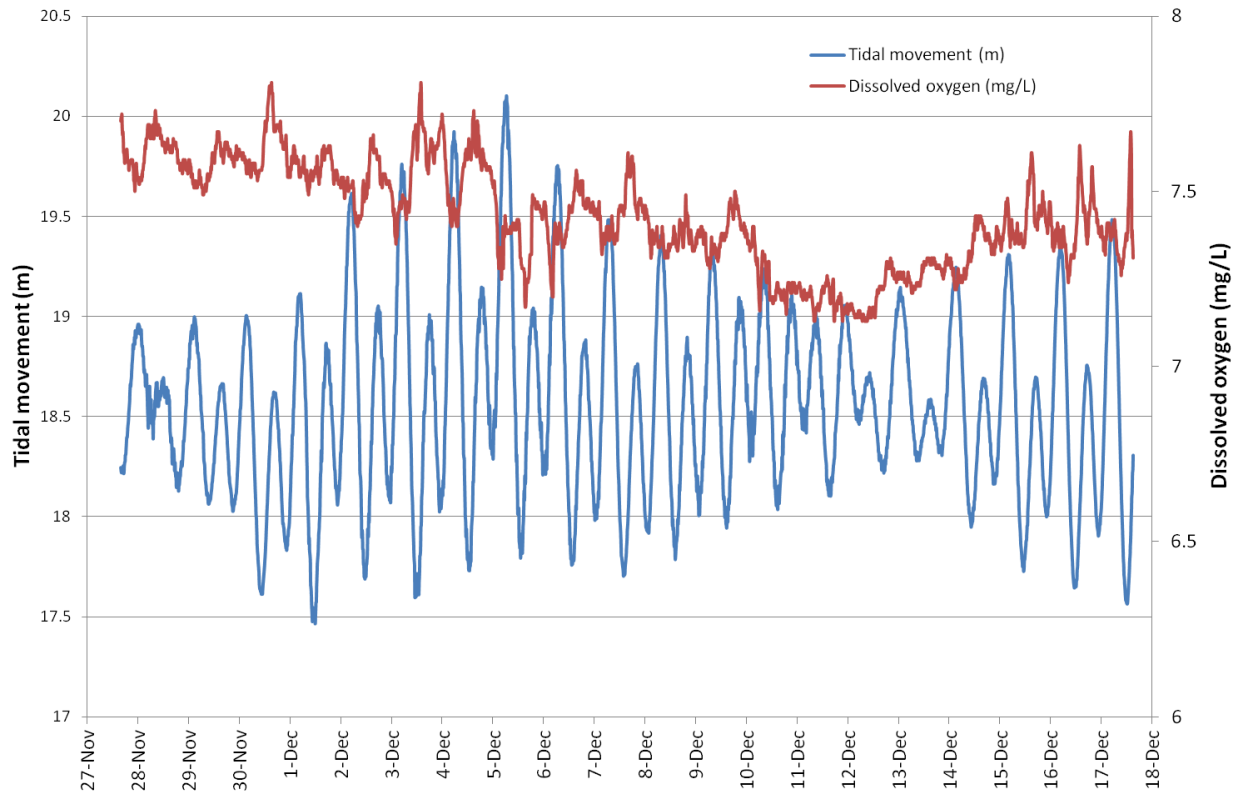

**Figure 3.** Changes in dissolved oxygen (mg/L) with tidal movement (m) over twenty one days, from 27<sup>th</sup> November to 17<sup>th</sup> December 2013.

### 3.3 pH


The daily average pH ranged from 8.1 to 8.3. Maximum daily variation was 0.2 (29<sup>th</sup> November; Figure 4). Average daily variation was < 0.1.

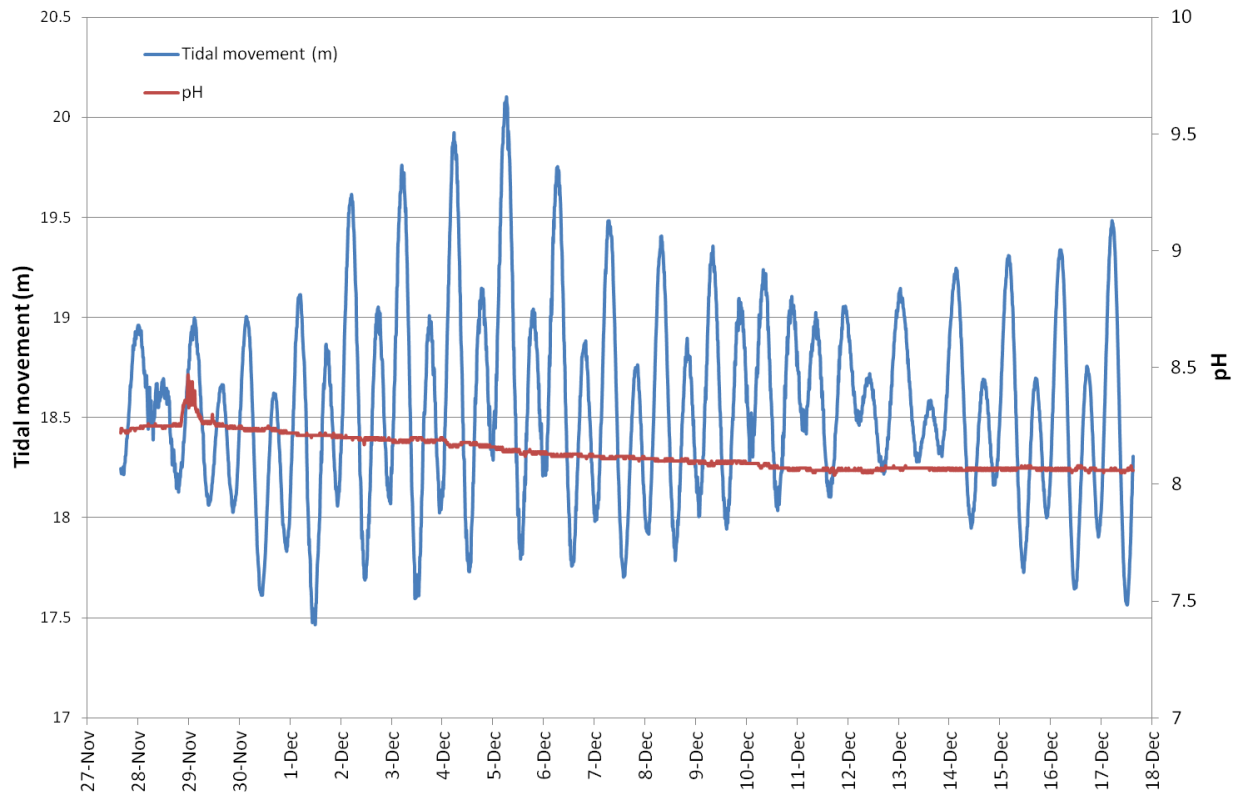

**Figure 4.** Changes in pH with tidal movement (m) over twenty one days, from 27<sup>th</sup> November to 17<sup>th</sup> December 2013.

### 3.4 Water temperature

The daily average temperature value ranged between 17.5°C and 18.9°C. Maximum daily variation was 0.7°C (28<sup>th</sup> November; Figure 5). Average daily variation was 0.4°C.

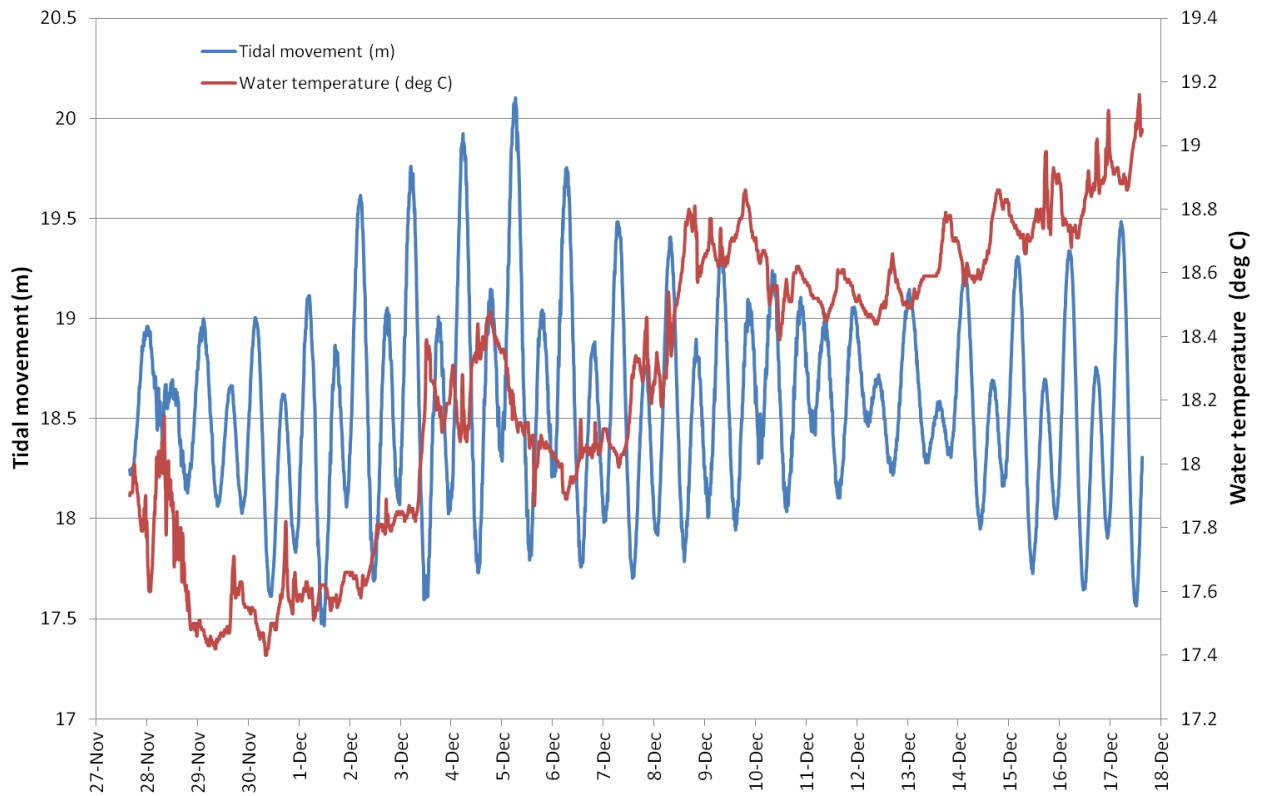

**Figure 5.** Changes in dissolved temperature (°C) with tidal movement (m) over twenty one days, from 27<sup>th</sup> November to 17<sup>th</sup> December 2013.